

Exploring the Need for Visually Impaired Walking Aids

Hussein Ali A. Algashamy
Al-Rafidain University College
Baghdad, Iraq
husseinali1@ruc.edu.iq

Alaa Salim Abdalrazzaq
Al-Noor University College
Nineveh, Iraq
alaa.salim@alnoor.edu.iq

Laith S. Ismail
Al-Turath University College
Baghdad, Iraq
laith.sabaa@turath.edu.iq

Serhii Palchyk
Kyiv National University of
Construction and Architecture
Kyiv, Ukraine
palchyk.sp@knuba.edu.ua

Abstract — Background: With the escalating number of visually impaired individuals globally, the demand for effective walking aids has intensified. While various solutions have emerged, many face constraints in their applicability.

Objective: This study delves into the advancements and limitations of modern walking aids designed for the visually impaired over recent years. It further seeks to establish a foundation for future research to enhance the functionality and efficiency of these aids, aiming to bolster the autonomy and safety of visually impaired individuals.

Methods: A comprehensive review of current walking aids was conducted, juxtaposing their merits and drawbacks. Emphasis was placed on advancements in sensors, computer vision, and smartphone integrations to ameliorate the challenges inherent in existing solutions.

Results: The study underscores a pressing need for holistic frameworks in designing walking aids tailored to the unique challenges faced by visually impaired individuals. While traditional aids like white canes and guide dogs remain prevalent, they often fall short of providing comprehensive navigational support.

Conclusion: Embracing cutting-edge technologies in walking aids design can considerably enhance the visually impaired's independence and quality of life. This article serves as a clarion call to stimulate further investigations into walking aids, enriching the prevailing body of knowledge

I. INTRODUCTION

Movement and exploration are two examples of everyday actions that people with cognitive impairments and other visual abnormalities need help with [1]. Almost 253 million people worldwide have some kind of visual impairment; of them, 217 million have very limited vision and 36 million are totally blind [2], according to latest statistics from the World Health Organization. With a doubling of the number of visually impaired persons every decade, this is a rising problem that needs attention. Estimates suggest that by 2020, the number of blind people might have increased by a factor of two [3]. Blindness, or the inability to see clearly, is a condition brought

on by a malfunction in either the body's physiological systems or its neurological systems. Despite significant technological advances, blindness remains a severe issue [4], [5]. Authors have been focusing on this issue in order to develop aids or supplementary tools for the visually handicapped. A select set of frameworks and navigational aids are available to the visually impaired. White canes and guide dogs are the most important tools.

Nevertheless, their effectiveness is hampered by the limitations of speed, coverage, and capacity that are often accessible to people who rely on sight for navigation [6]. Walking aids have been utilized to alleviate the day-to-day stresses of mobility support, such as orientation and orientation, since the 1960s. The assistants aid the blind by using sensors to capture information about the surroundings, which is then used to guide the blind person avoid obstacles [7].

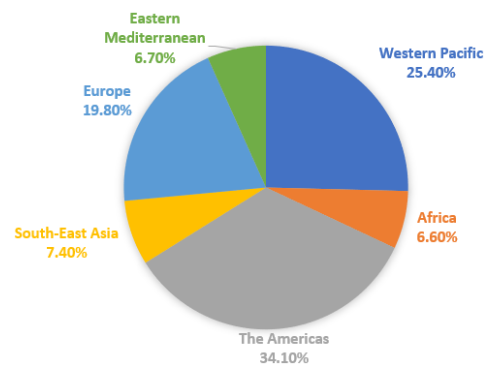


Fig. 1. Blind People Across the World

The primary objective of this piece is to design a mechanism that safeguards vehicles from crashing into obstacles in blind spots, such as those found in parking garages. The parking aid uses an ultrasonic sensor to determine how far away a vehicle is from an obstacle [8]. An Arduino board serves as the microcontroller. Parking assistance features include light-emitting diodes (LEDs [9]) that indicate where the car can and cannot go, and liquid crystal displays (LCDs) that show how far

away the vehicle is from obstacles. The driver and onlookers are alerted through a buzzer when a vehicle approaches dangerously near to an obstacle. The proposed method ensures that the driver is always aware of their surroundings throughout the parking process. Parking assistance systems are devices that are put on walls to help motorists park safely and without causing any harm in confined areas like garages. Avoiding time-consuming distance estimates may save significant effort. This kind of parking is not only required but may also be useful in reducing the likelihood of accidents. It helps prevent car accidents and other parking-related damages [4].

The difficulty of self-driving cars lies in their need to simultaneously perceive their surroundings and act swiftly to avert potential collisions. Intelligent algorithms, coupled with adaptable hardware and software, can make it a reality. In this case, the technology will be employed in urban areas, thus the top speed of the vehicle will be limited to around 40 km/h [5].

With this setup, environmental factors will be monitored via a network of ultrasonic sensors mounted across the vehicle's exterior. The controller will be an Arduino microcontroller, and the learning algorithm will be an artificial neural network. There are a total of four sensors installed to track the status of the front car, one on the right side, two on the left side [6], and two in the rear to both ends. Each cluster of sensors has a different control technique, determined on its function and its distance from the wall.

A. Problem Statement

The everyday lives of those who are blind or visually impaired are fraught with difficulties, particularly when it comes to mobility, especially while out and about in public. While sticks and guide dogs are widespread, they are not necessarily reliable sources of information about one's immediate surroundings. Furthermore, they may not accommodate the wide range of requirements of people with vision impairments. As a result, there is a pressing need to investigate the usefulness of cutting-edge walking aids for the visually handicapped which will offer more detailed data and accommodate specific requirements. The purpose of this research is to determine whether or not new walking aids are required to assist people who are visually impaired in overcoming the obstacles they experience on a daily basis.

B. The aim of the article

The article aim is to talk about the difficulties that people who are blind or visually impaired encounter on a daily basis, especially in terms of getting about and discovering new things. The article draws attention to the growing population of people with vision impairments and the limitations of conventional assistance like white canes and guide dogs. The article also discusses the importance of technological solutions, particularly in the development of walking aids for the visually handicapped, and the strides that have been achieved in this area.

The article examines the pros and cons of many different types of walking aids. Our ultimate goal is to inspire further

investigation into the creation of walking aids that make use of cutting-edge technology like sensors, computer vision, and smartphone-based support. This article describes the benefits that such technological solutions might have for those who are blind or visually impaired, including more independence and better quality of life.

The article goes on to address the use of technology in different contexts, such as parking assistance and autonomous vehicles. The goal is to showcase how technology can help make daily life easier and safer for those with vision impairments. The article's overarching goal is to promote the development of technological solutions that may enhance the quality of life for those who are visually impaired, namely walking aids for the blind.

II. METHODOLOGY

Acquiring all necessary parts obtaining, the necessary materials was a prerequisite to building the device. They had elements such as a motor that could cause vibrations, a switch, an ultrasonic sensor, and an audible warning. There was also a stick to use.

In order to create the device's central component—the stick—an ultrasonic sensor had to be attached to its front end first. The gadget can also make a chiming sound and flash a light. The cane's grip was outfitted with a vibrating motor to alert the blind of impending danger. A single switch activates both the audible alarm and the vibrating motor. The first setting activates the alarm, while the second setting begins the motor.

The blueprint was then used to build the device's parts in accordance with the instructions provided. For this procedure, the ultrasonic sensor, the loud alarm, the vibrating motor, and the switch must be fastened to the stick and linked in the appropriate fashion.

To ensure that the gadget could accurately recognize obstacles and provide timely notifications to the visually handicapped, it was put through rigorous testing after assembly [10], [11]. Testing included simulating a number of environments in which a visually impaired person could have trouble, such as a busy room or sidewalk.

In the end, we put the device through its paces to see whether it might help the visually impaired, and the results showed that it may really be useful. To determine whether or not the gadget is helpful in guiding the visually impaired around safely, we evaluated its precision, sensitivity, and responsiveness to alarms [12].

The process of making the gadget consisted of collecting the parts, attaching them during assembly, testing its accuracy and efficiency, and validating its ability to help the visually handicapped. The method used in this article highlights the value of careful preparation, careful attention to detail, and rigorous testing when developing assistive technologies for individuals with disabilities.



Fig. 2. The Position of the Sensors in the Car

III. METHODOLOGY

The article explains why and how microcontrollers are crucial components of modern electrical systems. Microcontrollers are programmable integrated circuits that include a central processing unit (CPU), memory, and input/output (I/O) circuitry. Embedded applications make advantage of these little computers, sometimes known as systems on a chip. Microcontrollers, in contrast to the multi-chip microprocessors used in personal computers, are built to perform a single function, such as the regulation of a light signal.

An 8-bit to 32-bit or even 64-bit central processor unit, input/output (IO) ports, peripheral peripherals including watchdogs, timers, and counters, and random-access memory (RAM) are the main components of a microcontroller. Further crucial parts are read-only memory (ROM) pulse maker or synchronizer, electrically erasable and programmable ROM (Flash memory), and ROM (read-only memory).

From inexpensive toys to complex factory automation systems, microcontrollers may be found in a broad variety of electronic devices. They're used for most processor-based tasks, with roughly 20% being very complex digital signal processors and the remaining 50% being "simple" microcontrollers (DSPs). Vehicles with a production run of more than 50 examples often include these controls.

Microcontrollers come in a wide variety of sizes and forms, each with its own specific set of hardware needs. The Harvard Architecture is used in microcontrollers, and it divides the microcontroller's memory into two distinct sections, one for storage and one for instructions.

With microcontroller units, a basic electrical system may be developed with little resources. The microcontroller board has a microprocessor along with many specialized peripherals. Consequently, it is essential to take into account the microcontroller's needs while developing an electrical system.

It is crucial to understand the hardware requirements of microcontrollers in order to develop reliable and efficient electronic systems. Microcontrollers come in a wide variety of forms and sizes, each with its own set of specifications that must be taken into account when designing an electronic system. A greater understanding of the role of microcontrollers in embedded applications may help designers develop more effective, purpose-built solutions.

The ATmega328p serves as the foundation for the Arduino UNO, a microcontroller board. It has 20 pins, including 16 digital I/O pins, 6 analog I/O pins, a 16MHZ quartz crystal, a power connection, an ICSP header, and a reset button, which is more than the PIC microcontroller has. Arduino's intuitive design makes it easy for anybody to pick up and start tinkering with. It runs on 5V and may be connected to a computer through USB. A battery or AC-DC converter may be used as an alternative source of energy [3], [13].



Fig. 3. Arduino UNO

The device's central processing unit (CPU) is an Arduino Nano. It manages the whole operation and controls the connected components by signals it sends forth. The Arduino Nano may be programmed using the Arduino IDE [14]. The communication mechanism is the same as the original STK500 [15].

The ultrasonic proximity sensor is a sensor that measures distance with the use of ultrasound waves. It works in a manner similar to that of a bat's sense of hearing: it emits ultrasonic waves into the air and measures the time it takes for the echoes to bounce back to it using an electric current. Hence, he is able to determine the exact distance to any close object or person. The ultrasonic waves used in the ultrasound examination typically range in frequency from 0.1 MHz to 15 MHz, but may go up to 50 MHz on occasion. These waves are directed towards the item in order to analyze its structure. The most common use is ultrasonic thickness measuring, which is used to detect and monitor pipe wall erosion. This technique is used for testing steel and other metals and alloys. Composites, wood, and concrete may all be evaluated with varying degrees of success using this method (concrete). This kind of non-destructive testing is used in the automotive, aviation, and transportation sectors [16], [17].

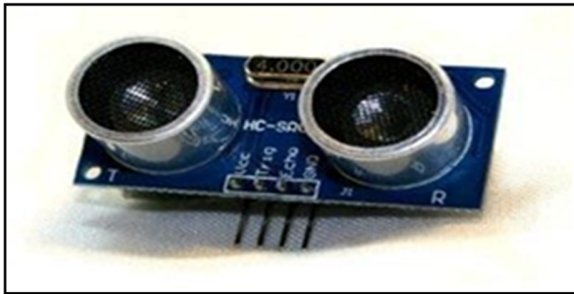


Fig. 4. Ultrasonic Sensor

Precise Microdrive's Pico Vibe series includes coin vibration motors, often called shaftless or pancake vibrator motors, with typical diameters ranging from 8 mm to 12 mm. Pancake motors are small and easy to carry along. Since they have no exterior moving components and can be securely fastened in place using a self-adhesive mounting mechanism, they may be incorporated into a wide variety of designs [17].

Our shaftless vibration motors come in a convenient coin shape that fits easily into enclosures. We have both leaded and spring & pad mountable coin motors available. We are pleased to provide an estimate for custom modifications to the standard design of our vibration motors, including changes to the lead length and connections.



Fig. 5. Coin Vibration Motors

TABLE I. SMALL MOTOR SPECIFICATIONS

Hardware Specification	Value
Type	1034
Operating Voltage	2.5 ~ 4VDC
Min. Rated Speed	9000RPM
Max. Rated Current	90mA
Diameter	10mm
Height	3mm

An Arduino buzzer is a low-power loudspeaker whose output is proportional to the vibrational frequency and amplitude. The ability to play notes and recreate basic melodies is made possible. To play sounds like music or conversation, you'll need a loudspeaker equipped with an audio amplifier that can read audio files stored on an SD card [18].

TABLE II. ALARM BUZZER SPECIFICATIONS

Specification	Description	Example Value
Type	Piezoelectric or electromagnetic	Piezoelectric
Rated Voltage	The voltage required to operate the buzzer	12 VDC
Sound Output	The maximum sound level the buzzer can produce	85 dB
Frequency	The pitch of the sound produced by the buzzer	2.9 kHz
Current Consumption	The amount of current drawn by the buzzer when in operation	30 mA
Operating Temperature	The range of temperature within which the buzzer can function effectively	-20°C to +70°C
Mounting Type	The method used to attach the buzzer to the device or equipment	Through-hole
Dimensions	The physical size of the buzzer	12 mm x 9 mm x 9 mm
Housing Material	The material used to construct the buzzer casing	ABS plastic
Environmental Protection	The degree of protection the buzzer provides against dust and water	IP67
Approvals/Certifications	The standards and certifications the buzzer conforms to, such as RoHS, CE, UL, etc.	CE, RoHS

Although various sizes of nine-volt batteries are sometimes used, the transistor radio size known as PP3, IEC 6F22, or NEDA 1604 is the most prevalent one for powering robots [19]. It's possible to get consumer and industrial versions of every battery type. More costly industrial batteries may utilize chemistries that improve power-to-size ratios, reduce self-discharge for longer storage life, increase leakage resistance, and, for example, survive the extreme temperature and humidity of medical autoclave sterilization.

IV. RESULTS

The incorporation of software is essential in the creation of any technological gadget. Software plays a crucial part in allowing obstacle detection and alerting in an obstacle-detection device.

Arduino's Integrated Development Environment (IDE) is often used to create the code and the Arduino module (IDE). This software was developed with Arduino in mind and includes a number of useful features and functions for creating and debugging applications.

The Arduino integrated development environment (IDE) has a code editor, message window, text terminal, and a toolbar with frequently used commands. It also has several menu options via which you can access the various features and tools.

The Arduino IDE's ability to streamline communication between the Arduino/Genuino hardware and its programmers is a major perk. This link is essential for the correct execution of the program and for the gadget to perform as designed.

Fig. 9 is a screenshot of the Arduino IDE, demonstrating some of the programming and coding functions and tools that

are at your disposal. The IDE's nice and straightforward design streamlines the process of creating software for gadgets.

A successful obstacle-detection system relies heavily on the software used to run the device. In order to design more effective, efficient, and user-friendly gadgets, developers may utilize tools like the Arduino IDE to ease the coding and programming process.



Fig. 6. Arduino Integrated Development Environment (IDE)

A. Innovative Design

The creation of cutting-edge tools and equipment relies heavily on creative design. Innovative design may assist increase the operation and efficacy of gadgets that can detect impediments. The gadget in question has two functions: identifying the obstruction and warning the operator.

The apparatus begins by identifying the obstruction. The usage of sensors or cameras are two examples of methods that may be used for this purpose. Both the existence of an obstruction and its distance from the device may be detected by these sensors. The signal transmitted to the alarm system increases in strength the closer the barrier is near the device.



Fig. 7. Detector

The alert system is the second component of the gadget. Sounds are used to notify the user rather than lighting. The quicker and more urgent the noise, the closer the problem is, and the more the user knows they need to take swift action to escape it.

As compared to conventional obstacle-detection methods, this cutting-edge layout offers several benefits. One advantage is that the user receives more rapid and intuitive input, as auditory signals may be absorbed more quickly than visual ones. In addition, persons who are blind or have low vision may use the gadget with ease since it relies on sound rather than lights or other visual clues.

The efficiency and usability of obstacle-detection tools may be enhanced by creative design. Designers may make gadgets that are more successful in guiding people around their environments securely by integrating new technology and methods.



Fig. 8. Vibrating motor part

B. Circuit Design for an Innovative Obstacle-Detection Device

The circuitry of the obstacle-detection system is seen in Figure 9. The tiny gears in the gadget need a special circuit that can handle their dimensions. Hence, an Arduino Mini is used to provide the circuit's juice.

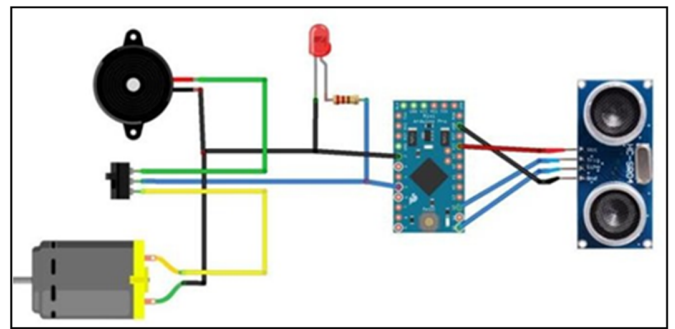


Fig. 9. System Circuit

There is a three-way switch in the circuit, and the center node is the common connection. The first is wired to the buzzer, while the second is attached to the motor that causes the vibrations. The LED is wired to digital pin 5 (D5) on the Arduino Nano, and the ultrasonic sensor is also linked to digital pin 5 (D5).

Connect the Trig Pin of the Arduino UNO to the 12-volt power supply, and the Echo Pin to a speaker or other audio output (10). Connecting the Arduino to the buzzer, vibrating motor, and LED enables the microcontroller to sound an alarm in the event of an obstruction.

There are several benefits to using Arduino in this circuit. Open-source and very flexible, Arduino is a platform that may be programmed to do a wide range of functions. Also, it's simple to implement, so it's a good fit for projects of this scope.

The obstacle-detection device's functioning relies heavily on the circuit layout seen in Fig. 12. It allows the gadget to identify potential dangers and warn the user with a beep, a jolt, or a flash of light.

C. Feedback Mechanisms in Obstacle-Detection Devices

There is a plethora of sensors on the market that may be used in the creation of obstacle-detection systems. While building and

creating a new device, it is important to keep in mind the distinct needs and requirements of each sensor type.

Sensors in obstacle-detection devices are generally built to detect environmental impediments and report their locations to the user. Depending on the device's architecture and the user's preferences, this input may be provided by sound, vibration, or light.

An example of a gadget that uses sophisticated sensors to locate impediments and report them to the user is seen in Fig. 10; this is a computer vision-based walking aid. Cameras, depth

sensors, and other cutting-edge technology work together to provide the user with immediate, actionable information as they move through their surroundings, making for safer and more efficient navigation. There is a wide variety of sensors used in obstacle-detection tools, and each has its own set of pros and cons. The success of a device relies on its sensors, which must be chosen based on their capacity to meet the device's intended function, and on a design that optimizes the device's usefulness to its intended audience. Sensor- and design-optimized obstacle-detection systems may make a world of difference for persons with disabilities, allowing them to move about their settings with more security and independence.

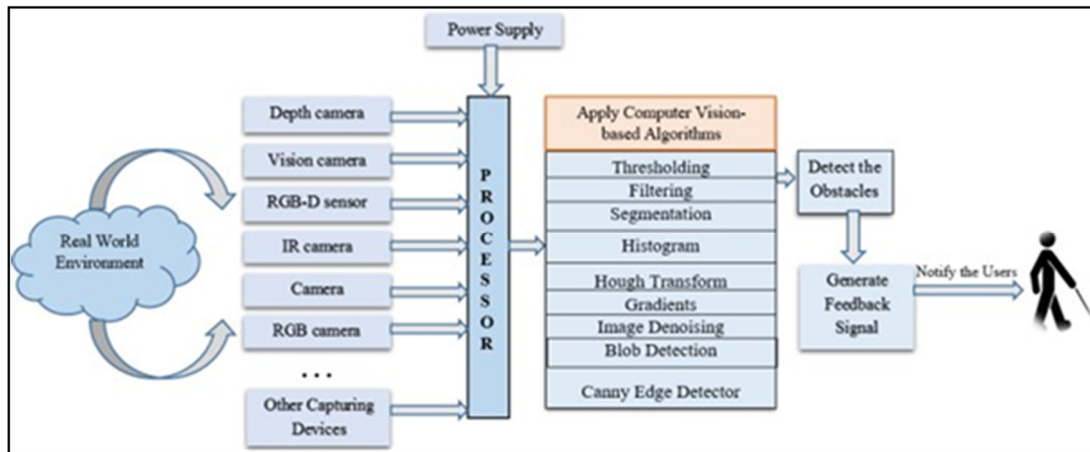


Fig. 10. The system design of walking aids based on computer vision

The article is for the benefit of those with visual impairments who need special assistance. Previous research has shown that the gadget may be implanted anywhere on a human's body, such as the hand, head, foot, or stomach. It is not the same,

which is holding it in the palm of your hand to make things easier and prevent issues that arise during detection, such as false alarms when there is no obstruction in the way.

Insights into the software, design, circuit, and feedback processes that went into making an obstacle-detection gadget are provided in this article. The importance of software implementation in developing any technical device is stressed, and the Arduino IDE is suggested as a valuable tool to facilitate the coding and programming process. The article argues that creative layouts might improve the efficiency of obstacle-detection tools. It showcases one such layout, which uses audible rather than visual warnings to deliver quick and understandable feedback to users (even those with limited or no vision).

The circuit layout for a novel obstacle-detection device is also explored; the Arduino Nano is suggested as the ideal microcontroller because of its open-source nature and ability to accommodate various applications. Figure 12 shows the circuit configuration that enables the device to detect threats and provide audible, tactile, and visual warnings to the user. The article also stresses the significance of optimizing the design to increase the gadget's utility to its target audience and selecting sensors based on their ability to satisfy the device's intended purpose.

The article highlights the importance of software implementation, creative design, and optimized circuit and

feedback mechanisms in building an obstacle-detection gadget. It is a helpful tool for designers who want to make devices that are accessible and easy to use for everyone, but especially those with mobility issues who need to go about without assistance.

TABLE III. RESULTS OF INNOVATIVE DESIGN FOR EFFECTIVE OBSTACLE-DETECTION DEVICES

Specification	Description	Example Value
Ideal Microcontroller	The recommended microcontroller for the obstacle-detection gadget	Arduino Uno
Sound-making Type	The type of sound-making device used in the gadget	Buzzer
Body Size	The physical size of the gadget	50 mm x 30 mm x 15 mm
Pin Pitch	The distance between adjacent pins on the gadget	2.54 mm
Rated Voltage	The voltage required to operate the gadget	5 V DC
Current	The amount of current drawn by the gadget when in operation	20 mA
Frequency	The frequency of the sound produced by the gadget	2.9 kHz
Operating Voltage	The range of voltage within which the gadget can function effectively	4.5 V DC to 5.5 V DC
Min. Rated Speed	The minimum speed at which the gadget can detect obstacles	0.1 m/s
Max. Rated Current	The maximum current that can be supplied to the gadget	50 mA
Diameter	The diameter of the sound-making device in the gadget	12 mm
Height	The height of the sound-making device in the gadget	9 mm

V. DISCUSSION

Visual impairment is a significant challenge faced by millions of people worldwide, affecting their mobility and independence. As technology continues to advance, researchers have explored innovative solutions to enhance the lives of visually impaired individuals. Among these solutions, visually impaired walking aids have gained significant attention, aiming to empower the blind with improved navigation, obstacle detection, and increased safety. This discussion explores the need for visually impaired walking aids and highlights several research studies that have contributed to this area.

One of the essential factors driving the need for visually impaired walking aids is the improvement of quality of life for visually impaired individuals. These aids play a crucial role in enhancing mobility, allowing the visually impaired to navigate unfamiliar environments with greater confidence and independence. By employing technologies like Internet of Things (IoT) [18], ultrasonic sensors [20], GPS receivers [1], and haptic feedback [22], these walking aids provide real-time assistance and environmental awareness.

Several research studies have focused on developing intelligent walking sticks and canes to cater to the specific needs of visually impaired individuals. For instance, the "iWalk" intelligent walking stick presented in [1] leverages IoT and GPS technologies to offer real-time navigation assistance, helping users avoid obstacles and find safe pathways. Similarly, the "BlinDar" system [2] utilizes IoT to create an invisible eye for the blind, offering obstacle detection and navigation support. These creative ideas highlight the power of technology to meet the issues that visually impaired people encounter.

A key aspect that scientists consider in developing visually impaired walking aids is cost-effectiveness. Low-cost solutions can ensure that these aids are accessible to a broader population, including those in developing regions where resources may be limited. Studies such as the "low-cost ultrasonic smart glasses for the blind" [17] and the "cost-efficient autonomous navigation system (e-cane)" [4] exemplify the efforts to create affordable and practical walking aids.

The compatibility and integration of new walking aids with existing systems are essential for seamless adoption. Technologies like GSM modules [1] and GSM compatibility in next-generation systems [21] enable data transmission and communication with smartphones, offering users real-time information about their surroundings. Such compatibility ensures that visually impaired individuals can easily incorporate walking aids into their daily routines.

The continuous improvement and innovation in walking aids present new possibilities and potential for even more sophisticated solutions. The article exploring the forward and inverse transformation of color temperature lines [3], [22] and near-field wireless charging for smart devices [13] may further enhance the functionalities of visually impaired walking aids, expanding their utility beyond navigation.

As visually impaired walking aids become more advanced and widely available, they can contribute to other areas, such as healthcare and assistive technologies. The use of ultrasonic sensors [20], haptic feedback [23], and infrared technology [24-26] can potentially be integrated into various wearable devices

and smart homes to support visually impaired individuals in multiple aspects of their lives.

The need for visually impaired walking aids is paramount in improving the quality of life and mobility of blind individuals. The integration of IoT, GPS, ultrasonic sensors, and haptic feedback technologies [2], [23], [27], [28] showcases the potential of these aids to address the specific challenges faced by the visually impaired. Cost-effectiveness, compatibility with existing systems, and continuous innovation are vital factors driving the development of walking aids [4], [24], [29]. As researchers and engineers continue to work in this field, visually impaired individuals can look forward to more inclusive and empowering solutions that facilitate independent navigation and improve their overall well-being.

VI. CONCLUSIONS

This article finishes with a review of the current state of assistive devices for those with vision problems, with a focus on face recognition, embedded devices, and mobile platforms. This article presents a summary of what makes a good vision impairment assistive device and how those goals may be achieved. The problems that emerge during detection are fixed and the device's usability is ensured for all user types by the article's new strategy of putting it in the palm of the hand. Several of the researched technologies are still in their early stages, yet they are already finding practical applications in everyday tools like cell phones. The results presented in this study should be useful for researchers who want to one day design walking aids for the visually impaired. Programming and compatibility issues with other pieces of equipment were only two of the many hurdles that had to be cleared in order to create a gadget that really works. In sum, the evidence presented here emphasizes the need of further study and development in the area of assistive technologies for the blind.

AI and machine learning may one day be utilized to improve the precision and efficacy of assistive devices for those with visual impairments. Adding feedback signal and other sensory inputs to the devices has the potential to enhance the user experience as well as render them simpler to use. Although, technical progress is undoubtedly important, it should not be mistaken for human support and help when it comes to those who are visually impaired. Nevertheless, it's important to see these innovations as complementing tools that may help people with vision loss live more independently and with more purpose.

This article's description of recent research on mobility aids for those with vision problems is useful for understanding the current state of the subject. Innovation in this industry is likely to continue because to the new technique of placing the device in the palm of the hand and the overcoming of programming and equipment compatibility issues. In the long run, these technologies have the potential to significantly improve the lives of people who are visually impaired by allowing them more freedom of movement and access to information and opportunities.

REFERENCES

- [1] R. F. Olanrewaju, M. L. A. M. Radzi, and M. Rehab: 'iWalk: Intelligent walking stick for visually impaired subjects', in Editor (Ed.) (Eds.): 'Book iWalk: Intelligent walking stick for visually impaired subjects' (2017, edn.), pp. 1-4

- [2] Z. Saquib, V. Murari, and S. N. Bhargav: 'BlinDar: An invisible eye for the blind people making life easy for the blind with Internet of Things (IoT)', in Editor (Ed.)^(Eds.): 'Book BlinDar: An invisible eye for the blind people making life easy for the blind with Internet of Things (IoT)' (2017, edn.), pp. 71-75
- [3] N. Qasim, and V. Pyliavskiy: "Color temperature line: forward and inverse transformation", *Semiconductor physics, quantum electronics and optoelectronics*, 23, 2020, pp. 75-80
- [4] A. Dastider, B. Basak, M. Safayatullah, C. Shahnaz, and S. A. Fattah: 'Cost efficient autonomous navigation system (e-cane) for visually impaired human beings', in Editor (Ed.)^(Eds.): 'Book Cost efficient autonomous navigation system (e-cane) for visually impaired human beings' (2017, edn.), pp. 650-53
- [5] N. Qasim, Y. P. Shevchenko, and V. Pyliavskiy: "Analysis of methods to improve energy efficiency of digital broadcasting", *Telecommunications and Radio Engineering*, 78, (16), 2019
- [6] D. Shahu, I. Shinko, R. Kodra, and I. Baxhaku: 'A low-cost mobility monitoring system for visually impaired users', in Editor (Ed.)^(Eds.): 'Book A low-cost mobility monitoring system for visually impaired users' (2017, edn.), pp. 235-38
- [7] N. S. Mala, S. S. Thushara, and S. Subbiah: 'Navigation gadget for visually impaired based on IoT', in Editor (Ed.)^(Eds.): 'Book Navigation gadget for visually impaired based on IoT' (2017, edn.), pp. 334-38
- [8] M. Geasa: "Development of an Arduino based universal testing apparatus", *Archives of Agriculture Sciences Journal*, 2022
- [9] Z. T. Ye, Y. H. Cheng, K. H. Liu, and K. S. Yang: "Mini-LEDs with Diffuse Reflection Cavity Arrays and Quantum Dot Film for Thin, Large-Area, High-Luminance Flat Light Source", *Nanomaterials*, 11, (9), 2021, pp. 2395
- [10] Q. N. Hashim, A.-A. A. M. Jawad, and K. Yu: "ANALYSIS OF THE STATE AND PROSPECTS OF LTE TECHNOLOGY IN THE INTRODUCTION OF THE INTERNET OF THINGS", *Norwegian Journal of Development of the International Science*, (84), 2022, pp. 47-51
- [11] A. Ş, and T. Çavdar: 'Ultrasonic Assistive Headset for visually impaired people', in Editor (Ed.)^(Eds.): 'Book Ultrasonic Assistive Headset for visually impaired people' (2016, edn.), pp. 388-91
- [12] M. Valinejadshoubi, O. Moselhi, A. Bagchi, and A. Salem: "Development of an IoT and BIM-based automated alert system for thermal comfort monitoring in buildings", *Sustainable Cities and Society*, 66, 2021, pp. 102602
- [13] A. M. Jawad, N. H. Qasim, H. M. Jawad, M. J. Abu-Alshaer, R. Nordin, and S. K. Gharghan: "NEAR FIELD WPT CHARGING A SMART DEVICE BASED ON IOT APPLICATIONS", *TTSIIT*, 2022, pp. 12
- [14] F. Kulor, D. E. Markus, M. W. Apprey, K. T. Agbevanu, and G. Gasper: "Design and implementation of a microcontroller based printed circuit scrolling message notification board", *IOP Conference Series: Materials Science and Engineering*, 1088, (1), 2021, pp. 012057
- [15] R. V. Jawale, M. V. Kadam, R. S. Gaikawad, and L. S. Kondaka: 'Ultrasonic navigation based blind aid for the visually impaired', in Editor (Ed.)^(Eds.): 'Book Ultrasonic navigation based blind aid for the visually impaired' (2017, edn.), pp. 923-28
- [16] H. M. U. Munir, F. Mahmood, A. Zeb, F. Mehmood, U. S. Khan, and J. Iqbal: 'The voice enabled stick', in Editor (Ed.)^(Eds.): 'Book The voice enabled stick' (2017, edn.), pp. 1-5
- [17] R. Agarwal, N. Ladha, M. Agarwal, K. K. Majee, A. Das, S. Kumar, S. K. Rai, A. K. Singh, S. Nayak, S. Dey, R. Dey, and H. N. Saha: 'Low cost ultrasonic smart glasses for blind', in Editor (Ed.)^(Eds.): 'Book Low cost ultrasonic smart glasses for blind' (2017, edn.), pp. 210-13
- [18] A. M. J. A.-A. Nameer Hashim Qasim, Haidar Mahmood Jawad, Yurii Khlaponin, Oleksandr Nikitchyn: "DEVISING A TRAFFIC CONTROL METHOD FOR UNMANNED AERIAL VEHICLES WITH THE USE OF GNB-IOT IN 5G.", *Eastern-European Journal of Enterprise Technologies*, 117, (9), 2022, pp. 53-59
- [19] K. Laubhan, M. Trent, B. Root, A. Abdelgawad, and K. Yelamarthi: 'A wearable portable electronic travel aid for blind', in Editor (Ed.)^(Eds.): 'Book A wearable portable electronic travel aid for blind' (2016, edn.), pp. 1999-2003
- [20] S. A. Pullano, A. S. Fiorillo, N. Vanello, and L. Landini: 'Obstacle detection system based on low quality factor ultrasonic transducers for medical devices', in Editor (Ed.)^(Eds.): 'Book Obstacle detection system based on low quality factor ultrasonic transducers for medical devices' (2016, edn.), pp. 1-4
- [21] N. Hashim, A. Mohsim, R. Rafeeq, and V. Pyliavskiy: "New approach to the construction of multimedia test signals", *International Journal of Advanced Trends in Computer Science and Engineering*, 8, (6), 2019, pp. 3423-29
- [22] N. Hashim, A. H. Mohsim, R. M. Rafeeq, and V. Pyliavskiy: "Color correction in image transmission with multimedia path", 2006
- [23] S. Rizvi, M. Asif, and H. Ashfaq: 'Visual impairment aid using haptic and sound feedback' (2017, 2017)
- [24] C. Tsirmpas, A. Rompas, O. Fokou, and D. Koutsouris: "An indoor navigation system for visually impaired and elderly people based on Radio Frequency Identification (RFID)", *Information Sciences*, 320, 2015, pp. 288-305
- [25] J. Bai, S. Lian, Z. Liu, K. Wang, and D. Liu: "Virtual-Blind-Road Following-Based Wearable Navigation Device for Blind People", *IEEE Transactions on Consumer Electronics*, 64, (1), 2018, pp. 136-43
- [26] N. S. Patil, et al., : "Regression models using pattern search assisted least square support vector machines", *Chemical Engineering Research and Design*, 83, (8), 2005.
- [27] K. Ujjwal, S. M. Sheshadri, D. Sabhari, A. Dhanuka, and A. Singh: 'Processing of Thermal Satellite Images Using MATLAB', in Editor (Ed.)^(Eds.): 'Book Processing of Thermal Satellite Images Using MATLAB' (2022, edn.), pp. 1-10
- [28] D. Vera, D. Marcillo, and A. Pereira: 'Blind Guide: Anytime, Anywhere Solution for Guiding Blind People', in Editor (Ed.)^(Eds.): 'Book Blind Guide: Anytime, Anywhere Solution for Guiding Blind People' (Springer International Publishing, 2017, edn.), pp. 353-63
- [29] F. Prattico, C. Cera, and F. Petroni: "A new hybrid infrared-ultrasonic electronic travel aids for blind people", *Sensors and Actuators A: Physical*, 201, 2013, pp. 363-70